


ALUMA-LOK
ENGINEERED RIGGING SYSTEM

AlumaLOK

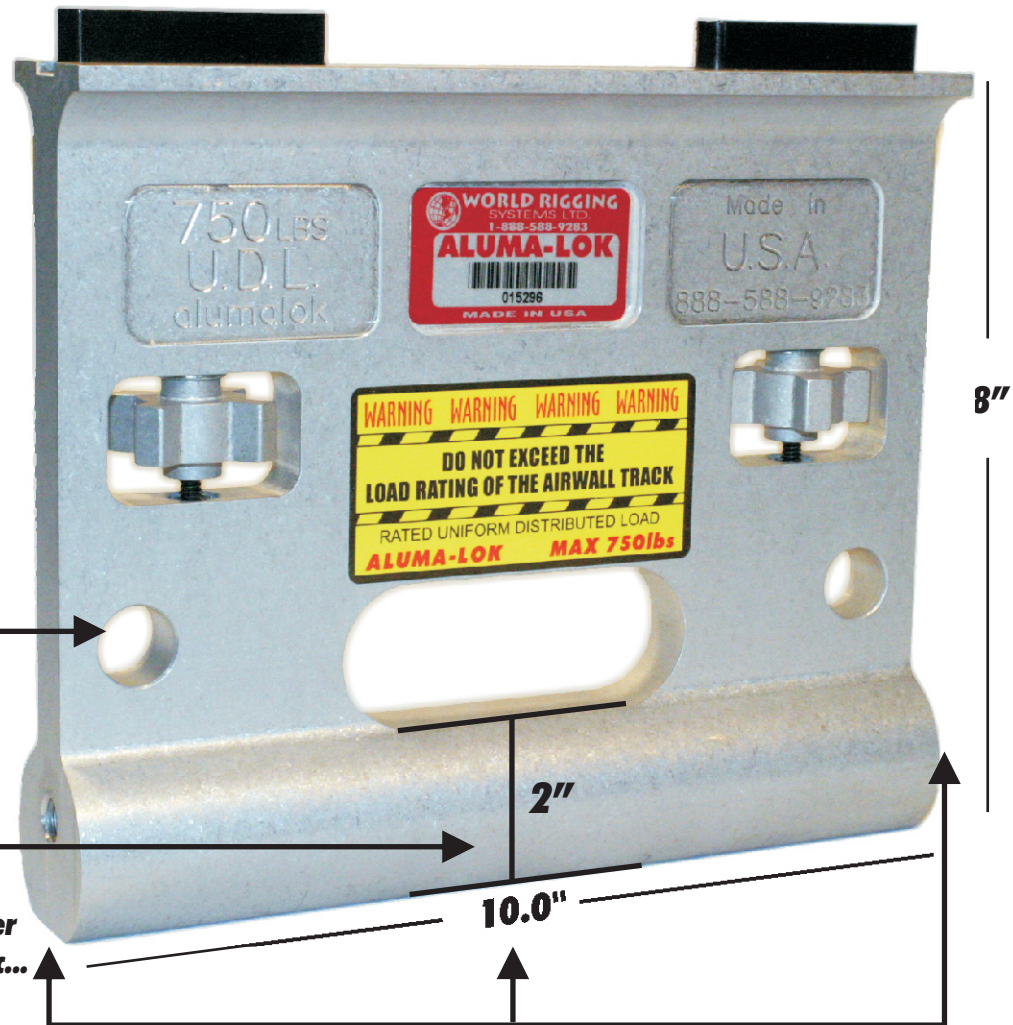

(2) 5/8" (16mm) Shackle Holes

(1) 2" attachment point for C-Clamp, cheeseborough, 1/2 coupler beam clamp, spanset, etc...

(3) 1/2" - 13 tpi threaded holes

Specifications

\$ 162.50 USD

Finish	Tumbled Mill Finish Aluminum
Dimensions	8" x 10" x 2" Body...8.35" body and grip arms
Weight	8 lb 4 oz (3.74kg)
Load Rated	750 lb UDL (340 kg) Working Load Rating (10:1 safety factor)
Attachment	(2) Shackle Hole 5/8" (16mm) & (3) 1/2"X 13TPI threaded holes (1) 2" (schedule 40 pipe size) for C-Clamp or 1/2 coupler or spanset



WORLD RIGGING SYSTEMS LTD.

859-514-1600 Voice 859-514-1606 fax 555 Merino Street Lexington, KY 40508